





WallBox AC Ensures you pay minimum  
on every charging

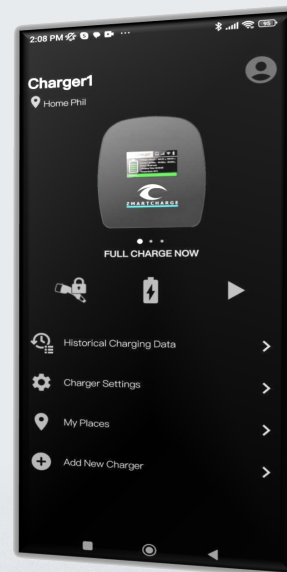

- Collects electricity prices and price area automatic
- Learns your charging pattern
- Auto-lock opens only for authorized users
- No electrician needed for installation
- Easy iOS and Android App use and setup
- Premium service program
- Load balancing management
- CE certification done by accredited test institution

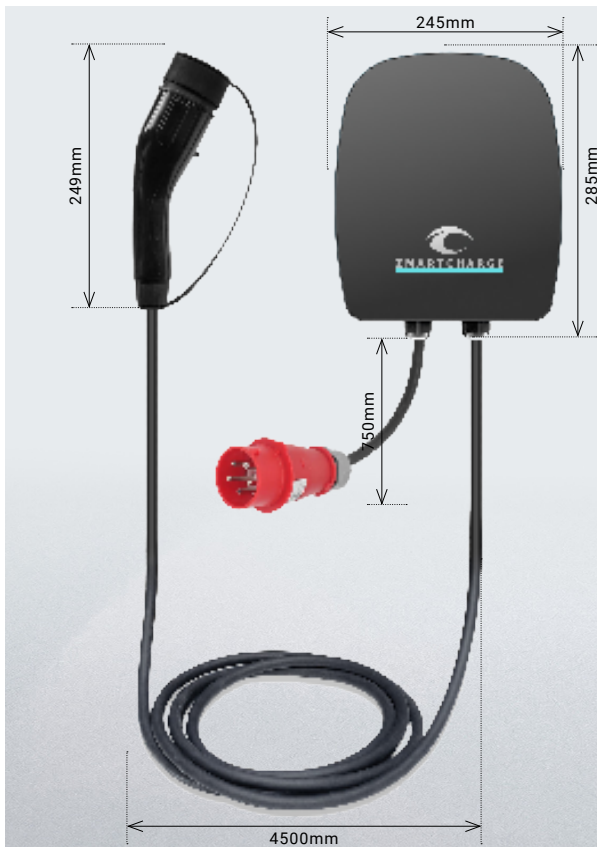

ZmartCharge App	
Versions	iOS and Android
Electricity Price Area Location	Automatic dedected
Electricity Prices	Automatically collected
Historical Charging	In kWh and price
Guest Access	Unlimited
Chargers that can be controlled	Unlimited



www.ZmartCharge.com

info@ZmartCharge.com

© 2024 ZmartCharge. All rights reserved.



Spend more time with your family.  
ZmartCharge handles charging!



## Specifications

Basic Information	» Product Code:	WallBox AC (HY220W3-T2)
	» Input Voltage:	230V/380Vac±15% - 3 Phase, IT or TN is auto-selected
	» Rated Current:	6~32A
	» Rated Power:	22KW
	» Power Supply:	1, 3 or 3 Phase is auto selected
Product Specification	» Charging Type:	Level 2
	» Charging Plug:	IEC 62196-2 (Type 2)
	» Power Plug:	CEE Red-5 Pin - 32 A -Adapters for other plugs available.
	» Power Cable	5x6.0mm <sup>2</sup> +/- 0.5mm <sup>2</sup>
	» Charging Cable:	5x6.0mm <sup>2</sup> +/-0.5mm <sup>2</sup>
APP Control	» Auto start when owner is near	
	» View historical charging records	
	» Guest access	
	» One click change from smart to charge full now	
User Interface	» LED Indicator and App	
Communication Interface	» OCPP 1.6J; Bluetooth; Wi-Fi and 4G (LTE)	
Smart Support	» Ensures maximum savings on charging, guest access and dynamic load balancing	
Working Environment	» Working Temp.:	-25°C ~ +70°C (-35°C optional)
	» Humidity:	5% ~ 95% Non-Condensing
	» IP Rate:	IP 65 for control box and IP 54 for charging plug
	» Work Altitude:	<3000m
Material Performance	» Body:	Thermoplastic; Flame Retardant Grade UL94V-0
	» Charging Plug Pin:	Pure Copper Silver Plated
	» Charging Cable:	Halogen Free; Pure Copper Core with TPU Cable Jacket
	» Mechanical Life:	>10,000 Times
Electrical Protection	» Over current protection; Residual current protection; Ground protection	
	» Surge protection; Over/Under voltage protection; Over / Under frequency protection	
	» Over temp protection; Leakage protection Type B (AC 30mA+DC 6mA)	
Dimension & Package	» Charger Size:	L285 × W245 × H88mm
	» Cable Length:	4.5Meter
	» Inner Box:	L447 × W337 × H185mm
	» Contains:	Charger, Mounting screws, Cable Hanger and user manual



[www.ZmartCharge.com](http://www.ZmartCharge.com)

[info@ZmartCharge.com](mailto:info@ZmartCharge.com)

© 2024 ZmartCharge. All rights reserved.